
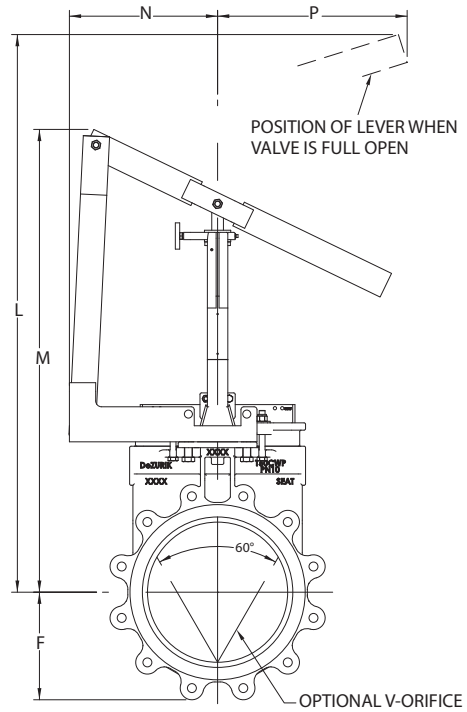


Dimensions

Basic Valve with Lever Actuator

Valve Size	Dimensions						
	F	H	J	L	M	N	P
2"	3.0	1.88	5.75	15.96	14.78	4.38	8.00
50mm	76	48	146	405	375	111	203
3"	3.75	2.00	7.75	21.78	17.75	5.38	17.88
80mm	95	51	197	553	451	137	454
4"	4.50	2.00	7.88	29.40	19.87	6.12	24.12
100mm	114	51	200	747	505	155	613
5"	5.00	2.25	8.62	37.50	22.76	7.38	19.81
125mm	127	57	219	953	578	187	503
6"	5.50	2.25	8.62	42.00	23.32	7.38	16.81
150mm	140	57	219	1067	592	187	427
8"	6.75	2.75	9.38	58.12	27.68	7.88	21.12
200mm	171	70	238	1476	703	200	536
10"	8.00	2.75	11.25	68.19	35.13	10.62	21.53
250mm	203	70	286	1732	892	270	699
12"	9.50	3.00	11.25	76.03	39.47	12.69	33.44
300mm	241	76	286	1931	1003	322	849



Inches
Millimeters

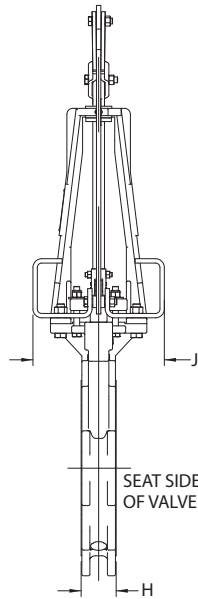

Basic Valve with Handwheel Actuator

Valve Size	Dimensions					
	F	H	J	L	M	N
2"	3.00	1.88	4.00	14.93	12.90	8.00
50mm	76	48	102	379	328	203
3"	3.75	2.00	4.75	16.65	14.62	8.00
80mm	95	51	121	423	371	203
4"	4.50	2.00	5.00	19.93	16.90	8.00
100mm	114	51	127	506	429	203
5"	5.00	2.25	5.75	24.30	19.56	12.00
125mm	127	57	146	618	497	305
6"	5.50	2.25	5.75	25.88	21.07	12.00
150mm	140	57	146	657	535	305
8"	6.75	2.75	6.38	31.43	24.65	12.00
200mm	171	70	162	798	626	305
10"	8.00	2.75	8.25	39.13	30.00	16.00
250mm	203	70	210	994	762	406
12"	9.50	3.00	8.25	44.75	33.63	16.00
300mm	241	76	210	1137	854	406
14"	10.50	3.00	8.25	54.75	40.82	20.00
350mm	267	76	210	1391	1037	508
16"	11.75	3.50	8.69	58.44	42.38	20.00
400mm	298	89	221	1484	1076	508
18"	12.50	3.50	9.06	67.75	49.69	20.00
450mm	318	89	230	1721	1262	508
20"	13.75	4.50	9.19	71.31	51.25	20.00
500mm	349	114	233	1811	1302	508
22"	15.5	4.50	9.19	77.22	55.36	20.00
550mm	394	114	233	1961	1406	508
24"	16.00	4.50	9.19	83.29	59.22	20.00
600mm	406	114	233	2116	1504	508

Inches
Millimeters

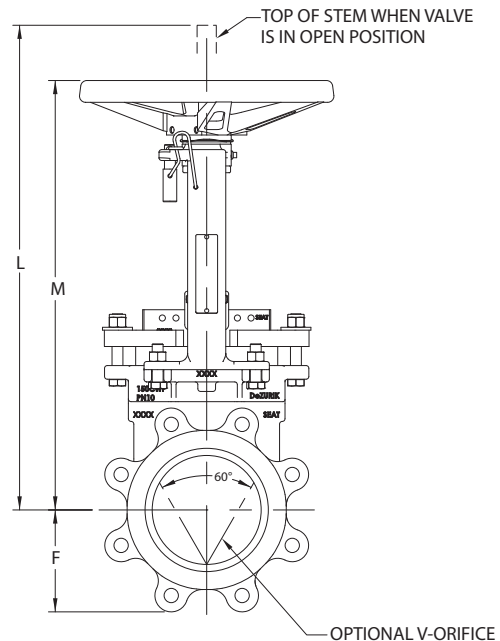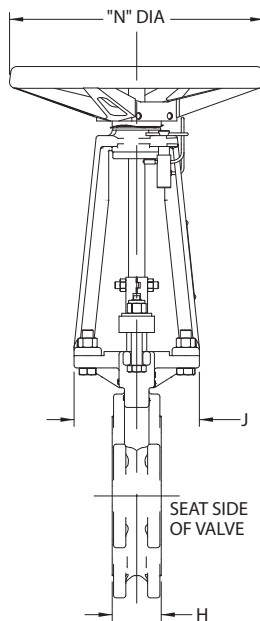


Dimensions

Bevel Gear Handwheel Actuator

Valve Size	Dimensions					
	F	H	J	L	M	N
3"	3.75	2.00	4.75	22.00	16.09	12.00
80mm	95	51	121	559	409	305
4"	4.50	2.00	5.00	24.30	18.37	12.00
100mm	114	51	127	617	467	305
5"	5.00	2.25	5.75	28.70	20.76	12.00
125mm	127	57	146	729	527	305
6"	5.50	2.25	5.75	30.30	22.29	12.00
150mm	140	57	146	769	566	305
8"	6.75	2.75	6.38	35.80	25.84	12.00
200mm	171	70	162	910	656	305
10"	8.00	2.75	8.25	46.50	31.54	12.00
250mm	203	70	210	1181	801	305
12"	9.50	3.00	8.25	50.20	35.16	12.00
300mm	241	76	210	1275	893	305
14"	10.50	3.00	8.25	56.70	37.78	12.00
350mm	267	76	210	1440	960	305
16"	11.75	3.50	8.69	60.40	41.47	12.00
400mm	298	89	221	1534	1053	305
18"	12.50	3.50	9.06	69.90	47.08	12.00
450mm	318	89	230	1775	1195	305
20"	13.75	4.50	9.19	73.50	50.59	16.00
500mm	349	114	233	1867	1285	406
24"	16.00	4.50	9.19	81.50	58.57	16.00
600mm	406	114	233	2070	1488	406
26"	17.13	4.63	9.50	100.95	64.49	30.00
650mm	435	117	241	2564	1638	762
28"	18.25	5.00	10.69	104.83	68.37	30.00
700mm	464	127	271	2663	1737	762
30"*	19.38	5.50	11.25	105.03	73.09	30.00
750mm	492	140	286	2668	1856	762
32"	20.88	6.00	11.25	113.20	76.74	30.00
800mm	530	152	286	2875	1949	762
36"*	23.00	6.00	11.25	122.53	84.59	30.00
900mm	584	152	286	3112	2149	762
42"	26.50	6.50	13.50	146.28	96.91	36.00
1050mm	673	165	343	3716	2462	914
48"	29.75	7.00	18.50	194.87	116.85	36.00
1200mm	756	178	470	4950	2968	914

* 100 psi, face-to-face (H dimension) on 30" and 36" (750 and 900mm) is 4.62" (117mm)

Inches
Millimeters

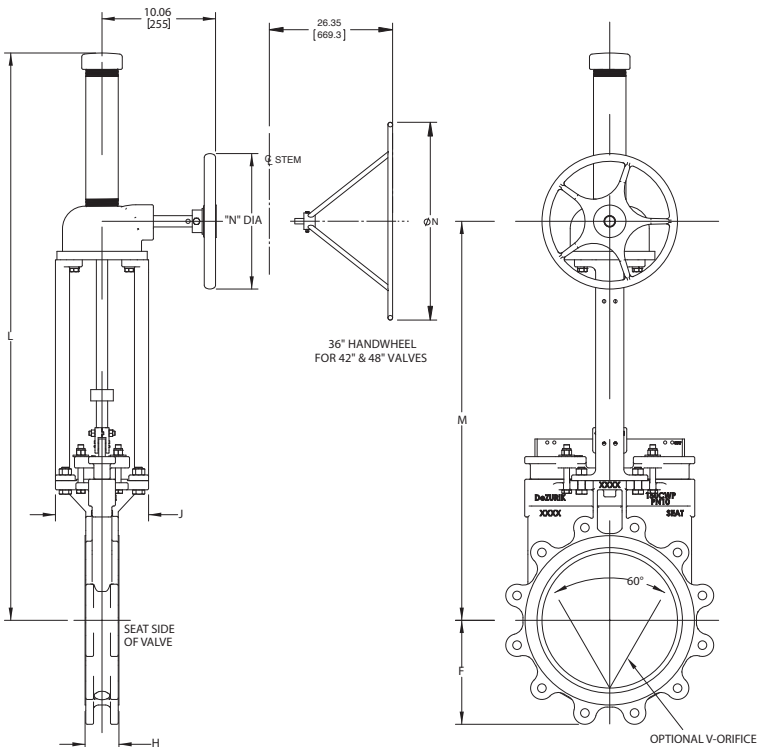


Dimensions

Basic Valve with Cylinder Actuator

Valve Size	Dimensions		
	F	H	J
2"	3.00	1.88	4.00
50mm	76	48	102
3"	3.75	2.00	4.75
80mm	95	51	121
4"	4.50	2.00	5.00
100mm	114	51	127
5"	5.00	2.25	5.75
125mm	127	57	146
6"	5.50	2.25	5.75
150mm	140	57	146
8"	6.75	2.75	6.38
200mm	171	70	162
10"	8.00	2.75	8.25
250mm	203	70	210
12"	9.50	3.00	8.25
300mm	241	76	210
14"	10.50	3.00	8.25
350mm	267	76	210
16"	11.75	3.50	8.69
400mm	298	89	221
18"	12.50	3.50	9.06
450mm	318	89	230
20"	13.75	4.50	9.19
500mm	349	114	233
22"	15.50	4.50	9.19
550mm	394	114	233
24"	16.00	4.50	9.19
600mm	406	114	233
26"	17.13	4.63	9.50
650mm	435	117	241
28"	18.25	5.00	10.69
700mm	464	127	271
30"*	19.38	5.50	11.25
750mm	492	140	286
32"	20.88	6.00	11.25
800mm	530	152	286
36"*	23.00	6.00	11.25
900mm	584	152	286
42"	26.50	6.50	13.50
1050mm	673	165	343
48"	Contact DeZURIK		
1200mm			

Inches
Millimeters

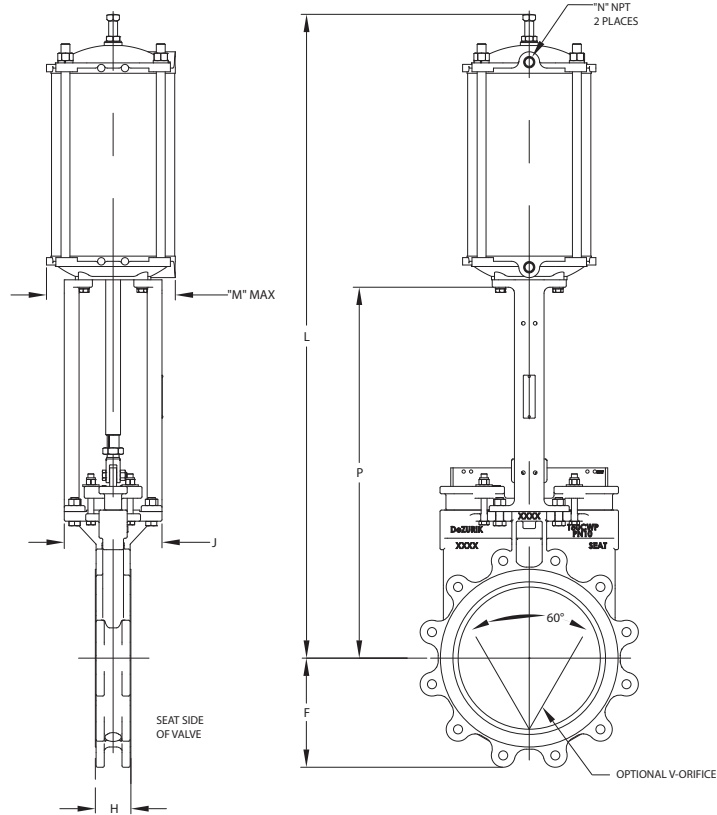

2-16" (50-400mm) Valves

Actuator Number	Dimensions										M	N
	L											
	2" 50mm	3" 80mm	4" 100mm	5" 125mm	6" 150mm	8" 200mm	10" 250mm	12" 300mm	14" 350mm	16" 400mm		
CY-PC4	22.26 565	23.98 609	26.26 667	30.64 778	32.18 817	—	—	—	—	—	5.38 137	1/4
CY-PC6	—	—	27.61 701	32.00 813	33.56 852	39.11 993	47.13 1197	None	—	—	7.88 200	1/4
CY-PC8	—	—	—	32.38 822	33.94 862	39.49 1003	49.57 1259	53.19 1351	59.06 1500	62.74 1594	10.50 267	1/2
CY-PC10	—	—	—	—	—	—	50.97 1295	54.59 1387	60.35 1533	64.03 1626	13.00 330	1/2
CY-PC12	—	—	—	—	—	—	50.94 1294	54.56 1386	60.70 1542	64.38 1635	15.00 381	1/2
CY-PC14	—	—	—	—	—	—	—	—	—	63.68 1617	17.00 432	1/2

Inches
Millimeters

18-48" (450-1200mm) Valves

Actuator Number	Dimensions													M	N
	L														
	18" 450mm	20" 500mm	22" 550mm	24" 600mm	26" 650mm	28" 700mm	30" 750mm	32" 800mm	36" 900mm	42" 1050mm	48" 1200mm				
CY-PC10	73.59 1869	77.16 1960	—	—	—	—	—	—	—	—	—	13.00 330	1/2		
CY-PC12	73.935 1878	77.495 1968	85.52 2172	89.475 2273	—	—	—	—	—	—	—	15.00 381	1/2		
CY-PC14	73.24 1860	76.81 1951	85.52 2172	88.78 2255	95.38 2423	101.44 2577	108.19 2748	—	—	—	—	17.00* 432	1/2		
CY-PC16	70.25 1784	75.94 1929	82.00 2083	87.91 2233	95.50 2426	101.56 2580	108.31 2751	113.94 2894	125.81 3196	—	Contact DeZURIK	17.00 432	1/2		
CY-PC18	—	—	—	88.16 2239	95.75 2432	101.81 2585	108.56 2757	114.19 2900	126.06 3202	143.19 3637		19.00 483	3/4		
CY-PC20	—	—	—	—	—	102.06 2592	109.81 2789	115.44 2932	126.31 3208	143.44 3643		21.00 533	3/4		

* M dimension on 26-30" (650-750mm) is 14.75" (375mm)

Inches
Millimeters

Sales and Service

For information about our worldwide locations, approvals, certifications and local representative:

Web Site: www.dezurik.com E-Mail: info@dezurik.com



250 Riverside Ave. N. Sartell, Minnesota 56377 • Phone: 320-259-2000 • Fax: 320-259-2227

DeZURIK, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing by DeZURIK, Inc. Certified drawings are available upon request.